

light-tec
be bright. save energy.



Campana HB 100w

Advantages

Unique flat wheel form design

Patented ADC12 graded lightweight housing

Driver with 4KV surge protection

Wide input voltage AC 100-277V

Optical glass over 90% light transmitting

LED 2835 chip with low lumen decay


IP65 driver with short circuit/over-flow/over-temperature/over-voltage protection

170lm/W, over 95% energy saving

Lifespan 50,000 hours, 3 years' warranty

Easy installation and low maintenance

Product size

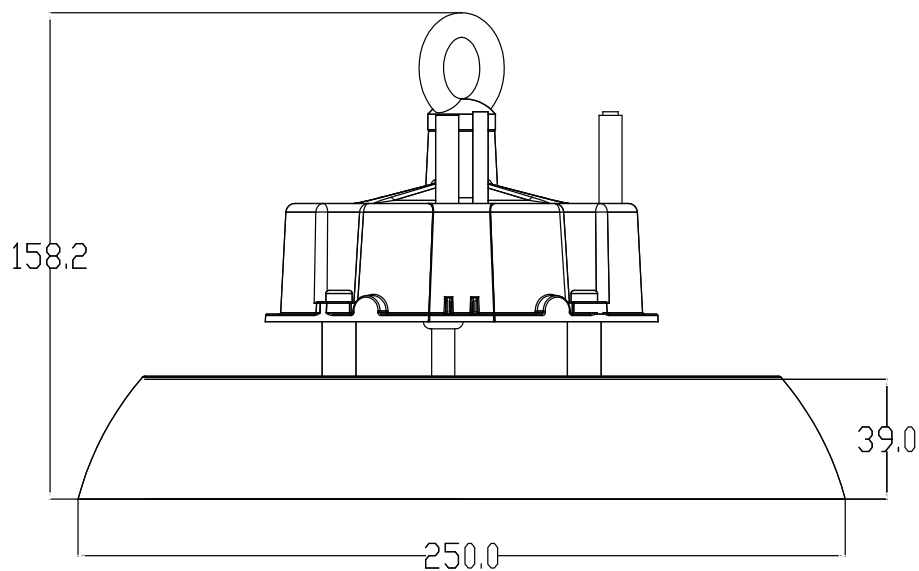

Unit: mm

Specification

Input Voltage	AC100-277V
Power	100W
Dimming	1-10v
Spd.	4KV
PF	>0.95
LED Type	2835
Beam Angle	120°
Light Efficiency	170 lm/W
Luminous	17,000 lm
Color Temp	6500k
CRI	>70
IP	IP65
Working Temp	-20°C~45°C
Storage Temp	-40°C~60°C
Life Span	50000h@25°C


Specification

QTY/Carton	1 pcs
Carton Size	300*300*170mm
N.W	2.0kg
G.W	2.5kg


Certification





Luminous intensity distribution diagram

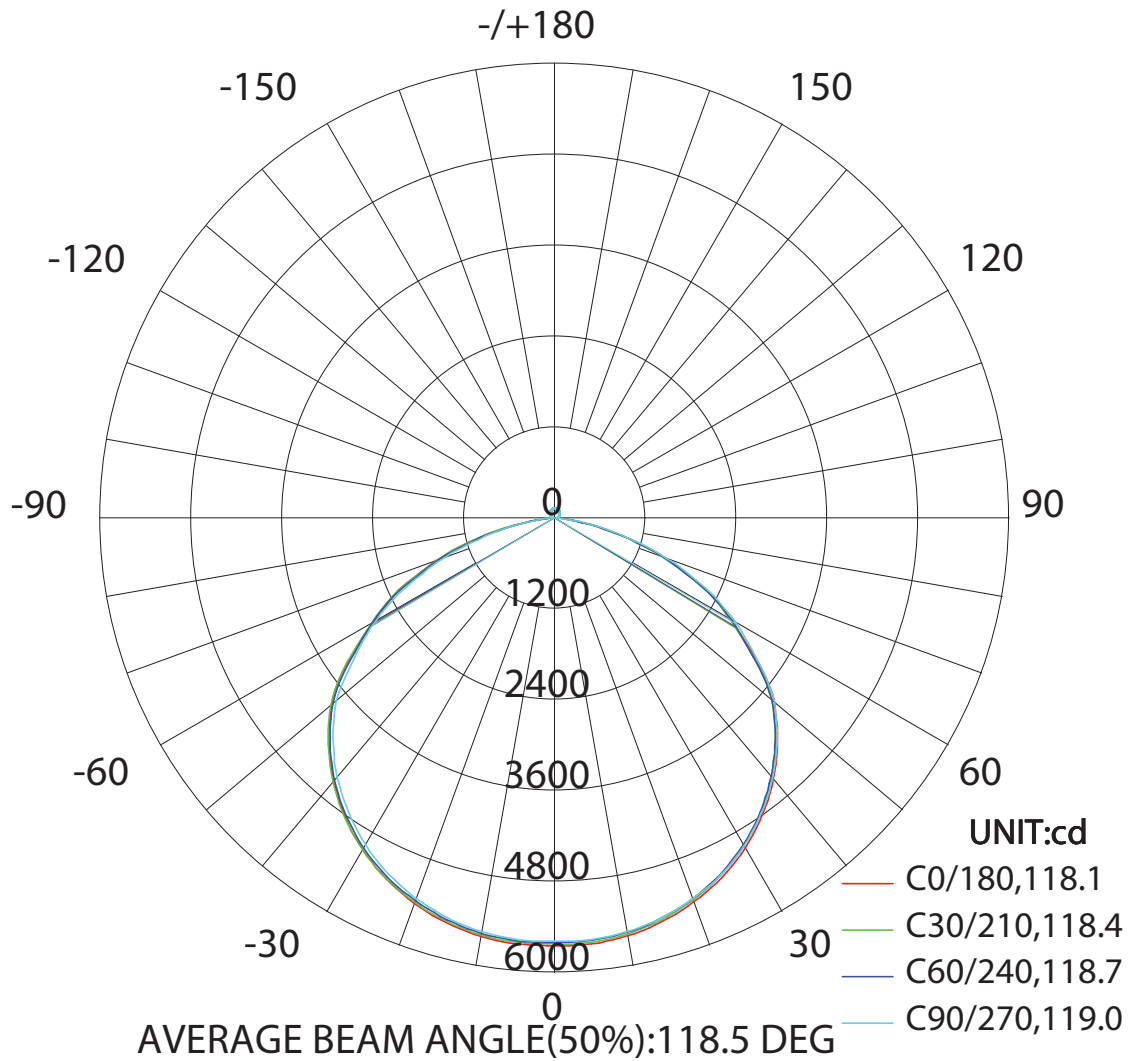


C0 Plane isolux diagram (unit:lx)

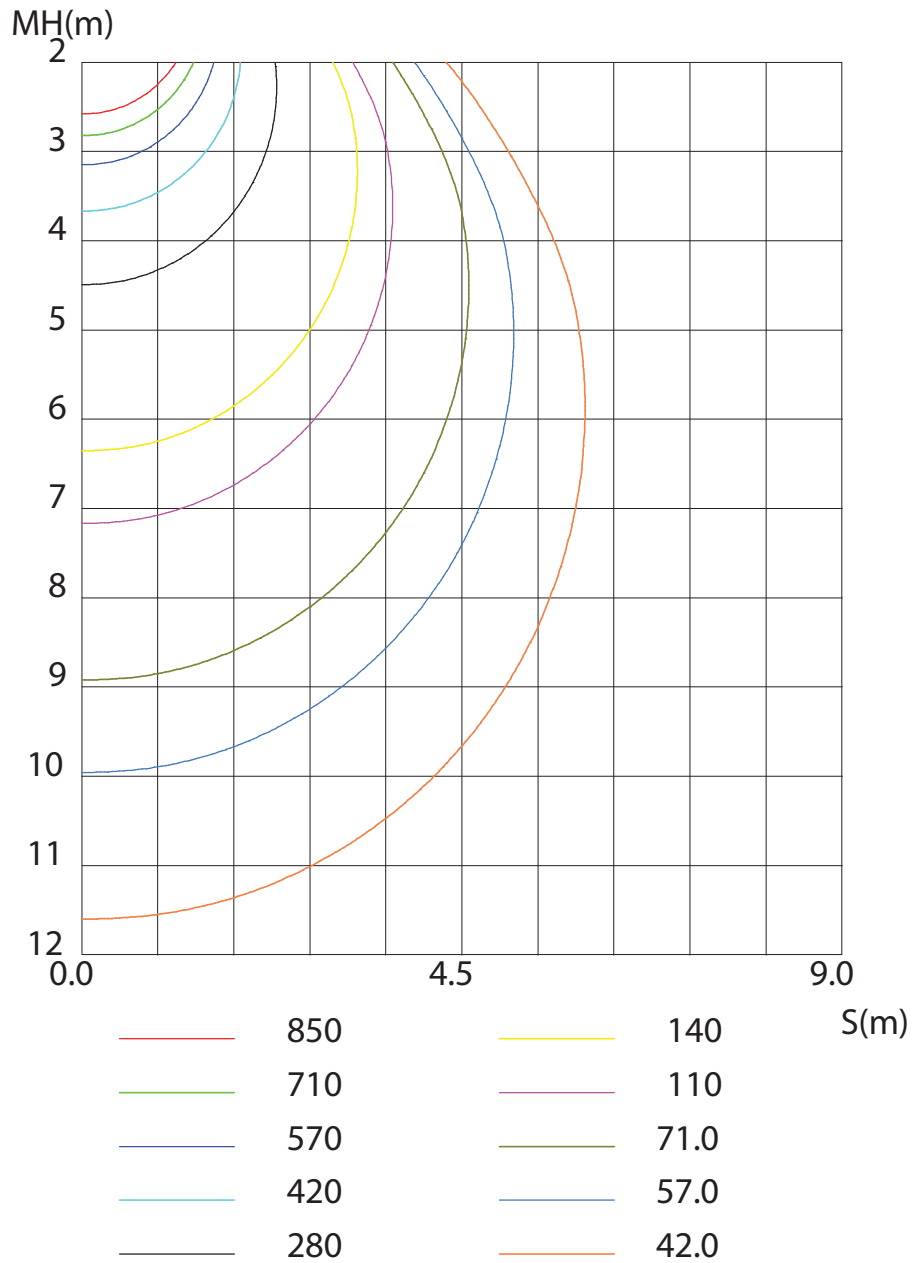

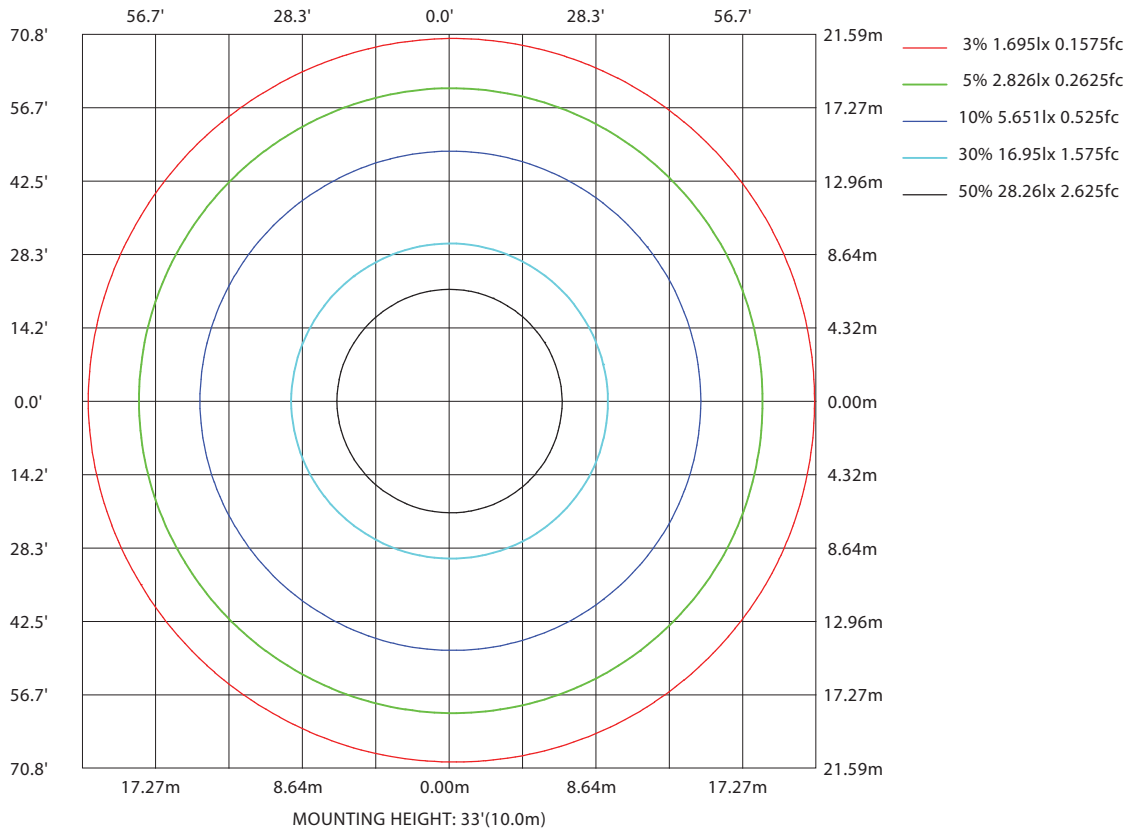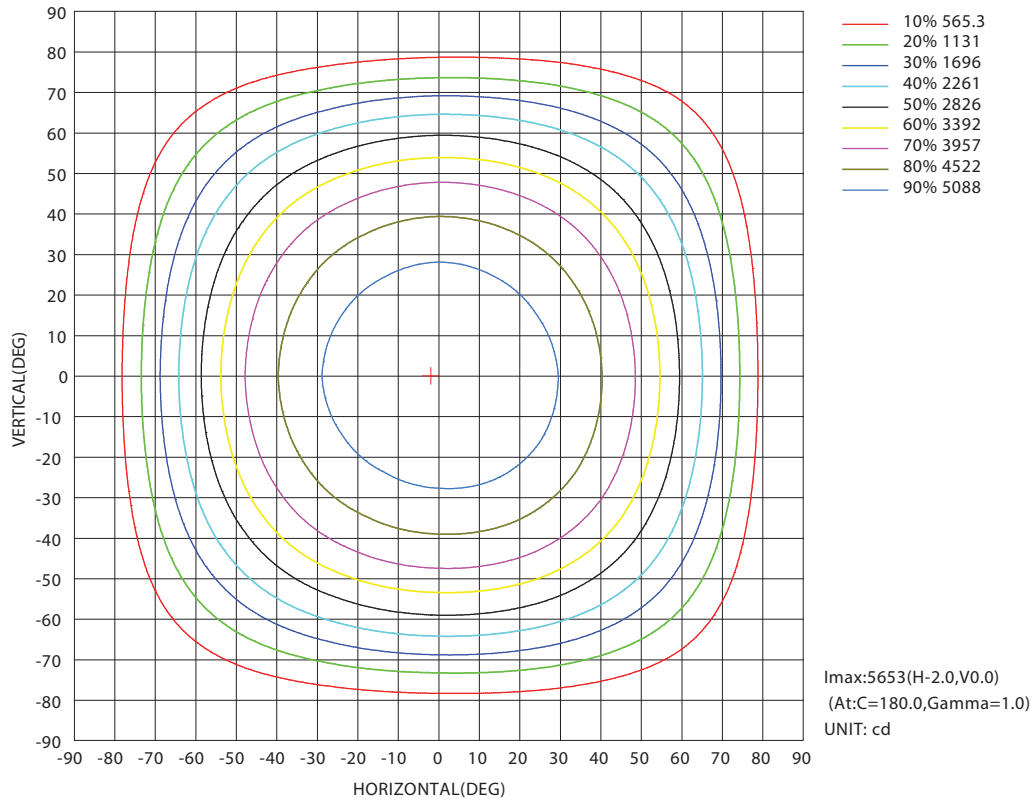

Flux out:13601 lm

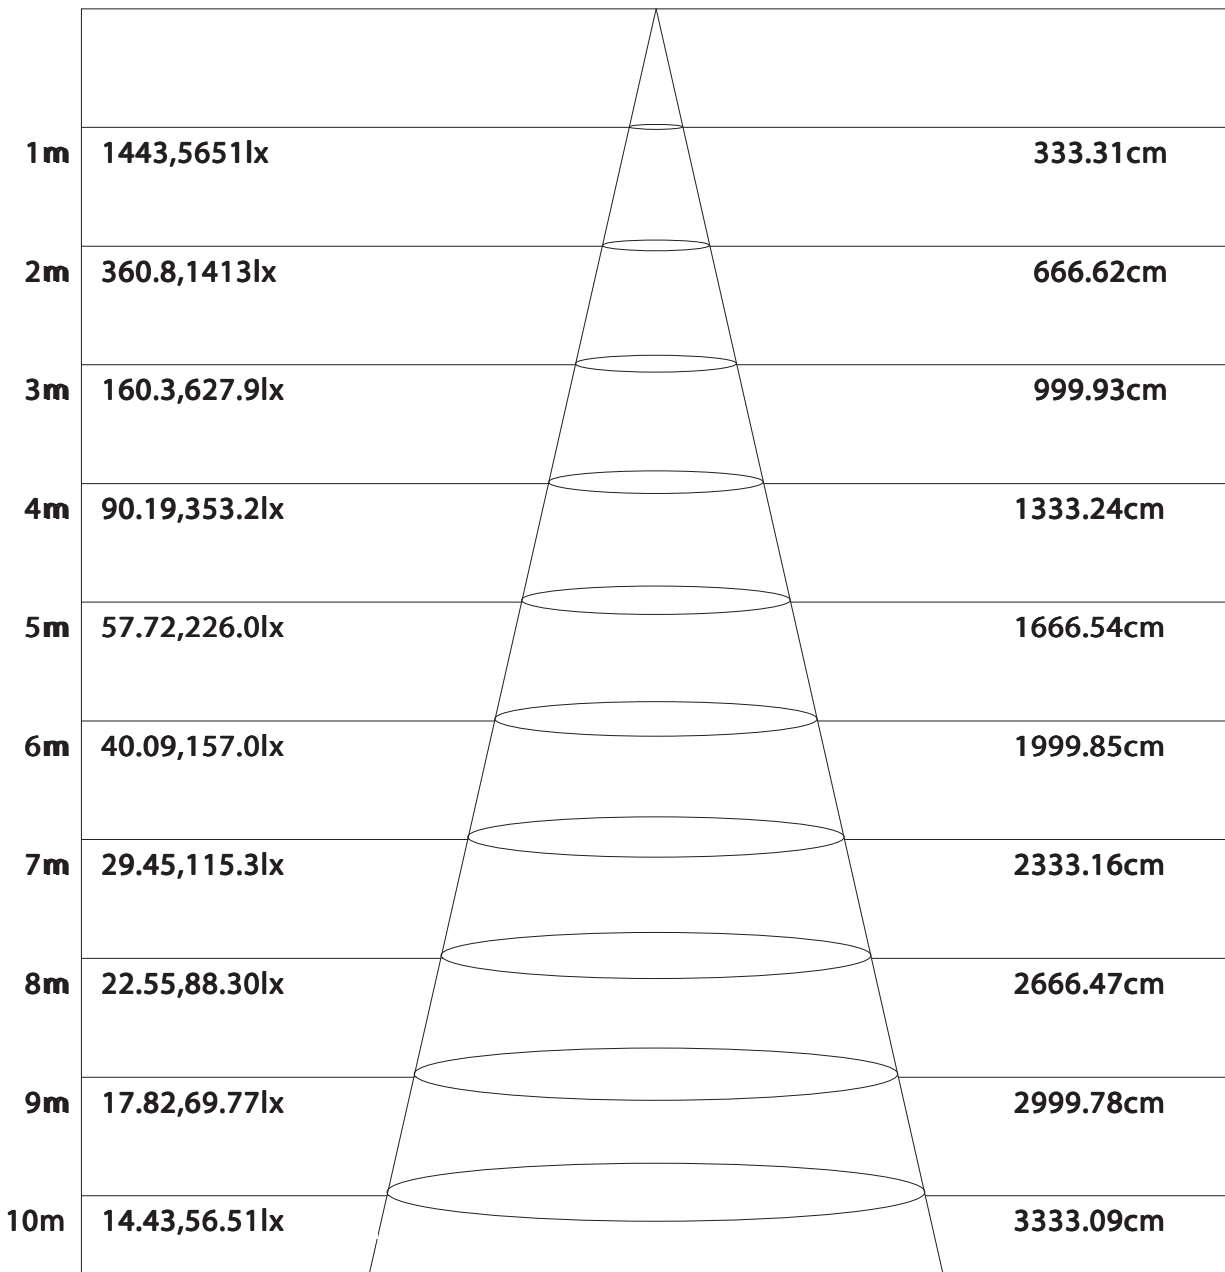

Height Eavg, Emax Angle:118.07deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.